




SERIE

Brite Guard

TEHNOLOGIA DE AUTOCURATARE DE LA BOHLE

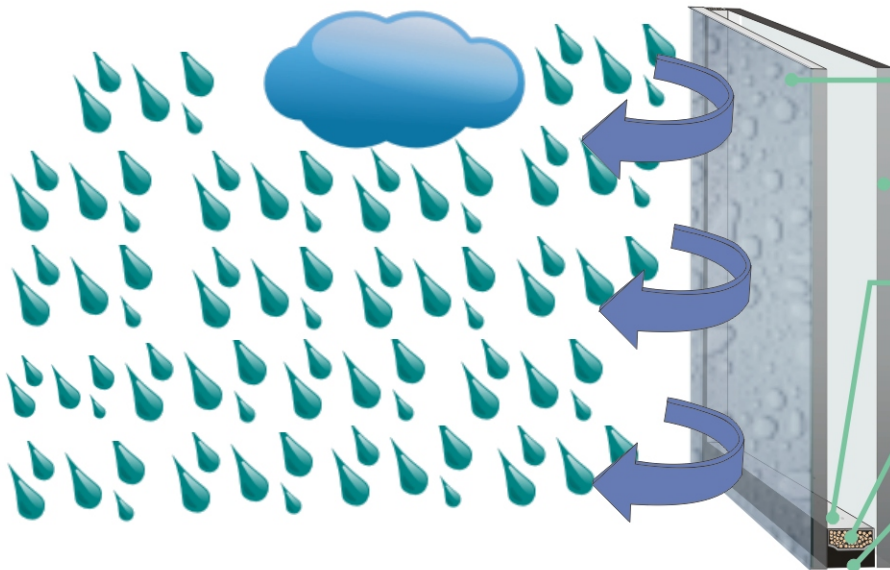

Un strat transparent dintr-un material fotocatalitic si hidrofil.

Sticla clar transparenta, fabricata prin procedeul FLOAT

Bagheta distantiara formata din aluminiu electrosudat

Agent deshidratant -cu rol de absorbire a umezelii dintre foile de sticla

Sigilant bicomponent polisulfidic

DESCRIERE

- Un strat neinterupt este complet incorporat **in suprafata sticlei**, ceea ce ii confera o rezistenta
- Stratul **Brite Guard** foloseste efectiv actiune a apei pentru **eliminarea murdariei** acumulate pe fata exterioara a geamului.
- Sticla cu Brite Guard este destinata geamurilor exterioare ale cladirilor, rezidentiale sau nu, fie ca este vorba despre o constructie nou sau in renovare: ferestre, ferestre-usi; verande; ferestre de acoperis; luminatoare; vitrine exterioare; mobilier urban.
- Curatarea** se efectueaza **mai rar**.
- Scaderea** substantiala a **chehtuielilor** de intretinere a geamurilor.
- Intretinerea este mai usor de realizat: **murdaria** adera **mai putin** la suprafata sticlei.
- Vedere clara pe ploaie.
- Eliminarea mai rapida** a condensului exterior.

Tabel caracteristici geam termopanului serie: Brite Guard Protect

Transmisia termica (Ug W/m2.K)	2,8
Factor luminos (LT)	82%
Factor energetic (TE)	73%
Factor energetic (AE)	14%
Performanta de izolatie acustica RW in dB	30

